
ChemStar Mechanical Packing, Inc.
Address: 3010 Reynolds Rd
Lakeland, FL 33803 USA
Office: (863) 425-5581 / (800) 397-5581
Fax: (863) 425-5762
Email: sales@chemstarpacking.com
Website: www.chemstarpacking.com

STYLE 1398

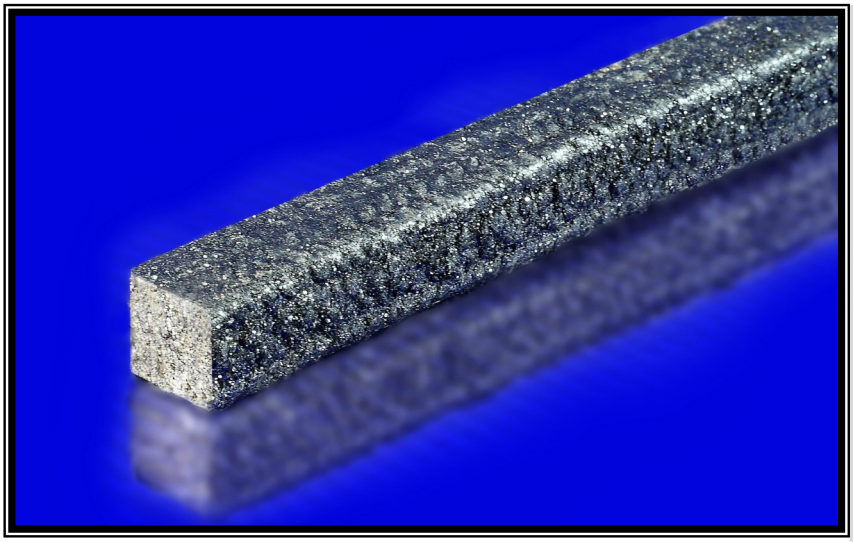

- Temperature: To 500°F / 260°C
- pH Range: 4-10
- Speed: 1500 FPM
- Pressure: 300 PSI / 20 Bar
- Construction: Interlock Braid

Description: Syntex fiber packing thoroughly impregnated with a high temperature lubricant. Finished packing is surface graphited.

Equipment: Rotating & reciprocating equipment and valves

Applications: Gases, mild acids & caustics, non-abrasives, oils, steam and water

Industries: Agriculture, General industry, Marine, Municipal/ Wastewater, Oil & Gas and Power generation