Double Disk Check Wafer Ductile Iron 150 PSIG

BODY DUCTILE IRON



- **Maximum working Pressure:** 150 PSIG
- **Disk and shaft stainless steel:** CF8M (316)
- **Seat elastometric:** BUNA N/EPDM
- **Maximum temperature operation:**
  BUNA-N -12°C (10°F) to 82°C (180°F)
  EPDM -18°C (0°F) to 110°C (230°F)
- **Featuring Memory seal seating technology**
- **Hidrostatic Test:** API 598
- **Diameters:** 2” to 24”


NOTE: Soft seated valves are not recommended for steam service.

* Reference photo

Double Disk Check Wafer Ductile Iron 150 PSIG

MATERIALS

	PART NAME	MATERIAL
1	BODY	DUCTILE IRON
2	SEAL	BUNA-N or EPDM
3	DISK	STAINLESS STEEL (CF8M)
4	STEM	STAINLESS STEEL
5	SPRING	STAINLESS STEEL
6	SCREW	CARBON STEEL

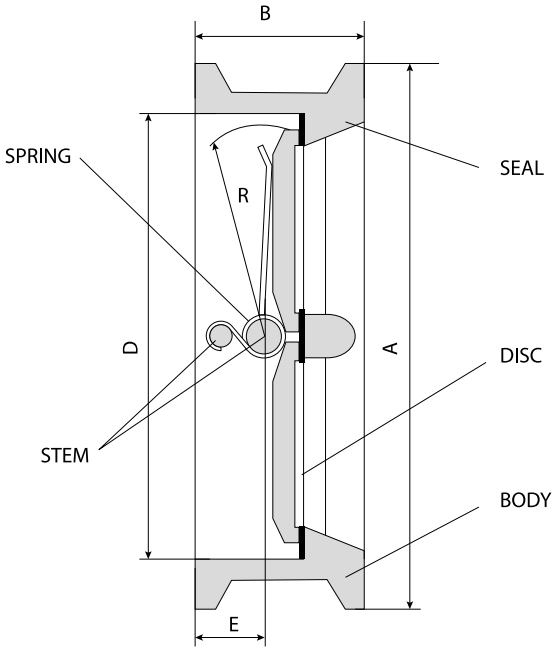

DIMENSIONS (mm)

SIZE	A	B	R	D	E	WEIGHT (KG)
2”	105	54	28	60	25	1.8
2 1/2”	124	54	35	73	25	2.7
3”	137	57	41	89	25	3.2
4”	175	64	53	114	29	5.4
5”	197	70	64	141	30	6.8
6”	222	76	78	168	19	9
8”	279	95	101	219	40	18
10”	340	108	125	273	40	29
12”	410	143	151	324	56	45
14”	451	184	171	356	94	61
16”	514	191	197	406	89	77
18”	549	203	222	457	86	100
20”	606	213	248	508	90	130
24”	718	222	295	610	87	152