REX®
REX VALVES

Gate Cast Iron ASTM A126 Class 125 RS OS&Y





* Reference photo

Body and Bonet Cast Iron ASTM A126
Bolted Bonnet
Rising Stem OS&Y
Design, Manufacture, Test in accordance with MSS-SP-70
Flange dimensions: ANSI/ASME B16.1
Face to Face dimensions: ASME B16.10
Hydrostatic Testing API 598
Sizes from 16" with Gearbox
* Certification pending to norm MSS-SP-70 from Manufacturers Standardization Society (MSS)

MATERIALS

	PART NAME	MATERIAL
1	BODY, BONET	ASTM A126B
2	SEAT RING	ASTM B62
3	DISC	ASTM A126B + ASTM B62
4	STEM	SS 410
5	BOLT/NUT	ASTM A307 -B
6	GASKET	GRAPHITE WITH SOFT STEEL
7	PACKING	GRAPHITE
8	STEM NUT	ASTM B62
9	DISC RING	ASTM B62

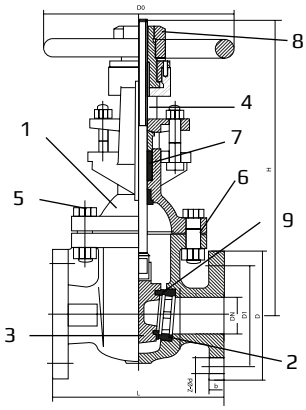



Sizes from 16" with Gearbox

Fiorella Representaciones S.A.C.
Importador y distribuidor autorizado de válvulas REX para Perú y para su exportación.

DIMENSIONS (mm)

SIZE	L	D	D1	b	Z-Ød	D0	H	WEIGHT (Kg)
2"	178	152	121	16	4-19	200	320	19
2 1/2"	191	178	140	18	4-19	200	345	26
3"	203	191	152	19	4-19	200	387	29
4"	229	229	191	24	8-19	260	490	50
5"	254	254	216	24	8.22	300	576	71
6"	267	279	241	25.4	8-22	300	680	88
8"	292	343	298	29	8-22	350	808	136
10"	330	406	362	30.2	12-25	400	1010	214
12"	356	483	432	32	12-25	450	1080	294
14"	381	533	476	35	12-29	508	1640	450
16"	406	597	540	36.5	16-29	558	1804	580
18"	432	635	578	39.7	16-32	610	2090	760
20"	457	699	635	42.9	20-32	610	2490	935
24"	508	813	749	47.6	20-35	762	2960	1230

PRESSURE TEMPERATURE RATINGS (PSI)

Temperature °F/°C	Class 125	
	2" to 14"	14" to 24"
(-) 20 ºF / (-) 29 ºC to (+) 150 ºF / (+) 66 ºC	200	150
200 ºF / 93 ºC	190	135
225 ºF / 107 ºC	180	130
250ºF / 121 ºC	175	125
275ºF / 135 ºC	170	120
300 ºF / 149 ºC	165	110
325 ºF / 163 ºC	155	105
350 ºF / 177 ºC	150	100
375 ºF / 191 ºC	145	95
400 ºF / 204 ºC	140	90
425 ºF / 218 ºC	130	80
450 ºF / 232 ºC	125	75

* Note : Dimensions, design and materials are subject to change without notice. Approximate weights.

MAC EDITIONS - MMXXIII
FIORELLA Representaciones S.A.C.