


LF55 Pressure Switch

LF55 series pressure switch are used with fluorinated refrigerants as well as air and water (Allowable Fluid Temp:-10 to 120℃) Type YSNS for Universal application.
Micro-switch ensures reliable switching.
Mounting Bracket supplied as standard. With SPDT contact mechanism.










Appearance Drawing

Specification


Model	Range(Bar)		Differential(Bar)		Factory Setting(Bar)		Max Operating Pressure(Bar)
	Min.	Max.	Min.	Max.	OFF.	ON.	
LF5508	-0.2	7.5	0.7	4	3	2	16.5
LF5514	2	14	1	4	10	8	16.5
LF5532	8	32	2	6	20	17	35

NOTE:IF MODEL+E MEANING IS ENGL ISH SYSTEM CONNECTION.
IF MODEL+S MEANING IS CAPILLARY TUBE.

Pressure Connectiors

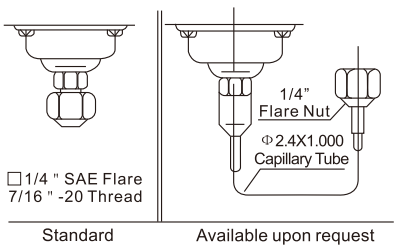

Mounting Bracket



Electrical Function

Rated Amps.(A) \ Rated Voltage(V)		125VAC	250VAC	24VDC
Non-Inductive Current		20A	10A	10A
Inductive Current	Full Load	15A	8A	8A
	Locked Roter	72A	72A	64A

Contact Function

